



X26-6-CB PreView[®] System

QUICK INSTALLATION GUIDE

info@radar-electronics.com
 http://radar-electronics.com
 Phone: +386 3 4900 800



1 Before You Start

Contents:
 XPV4226A-6 Sensor (1)
 Sensor Mounting Hardware (1)
 XPV-BK90 Sensor Bracket (1)
 A/BK Bracket Hardware (1)
 Cables (4)
 XPV41CA Cable (1), XPV41PA Cable 1'7/0.3M (1)
 XPV4132 32.8'10.0M (1), XPV41RA Cable 3.3'1M (1)
 CD6 Display(1)
 Display Mounting Hardware

User Manual

2 Mount Sensor

Select a location for the sensor approximately 3ft/1M from the ground. Ideally the sensor should be centered on the rear of the vehicle.

Important!
 Before the PreView Sensor is permanently installed to the vehicle, verify the selected location provides a clear detection zone. Temporarily attach the sensor in the proposed location, apply power to the system, and verify nothing is detected.

Mounting
 The sensor may be mounted directly on the machine or attached using a bracket. The bracket can either be bolted or welded onto the machine. If not using a bracket, mark the holes to drill using the sensor as a template and drill 4 - 5/16" (7mm) holes. A 1 1/2" diameter clearance hole is required for the sensor connector and the mating cable. Secure the sensor to the vehicle with the supplied hardware. Apply a maximum of 50 in-lbs to secure the sensor.

3 Install Cables

Routing the body harness should start at the rear of the vehicle and end in the cab. To enter the cab, drill a 1 1/2" (38mm) hole and feed the connector through to connect to the cab adapter.


Important!
The sensor mating connector is fully waterproof if mated properly. The connectors with a collar (coupling ring) must be turned to the right until they lock with the mating connector. Latch(es) on mating connector must click (locking connectors together). Do not route cable next to heat sources or area that may see abrasion or rock and debris damage. Bundle and store any excess cable.

4 Mount Display

Mount the display in a location easily viewed by the driver. Possible locations for the display is on the dash or by either windshield pillar.

Not all hardware shown

Note orientation:
THIS SIDE UP

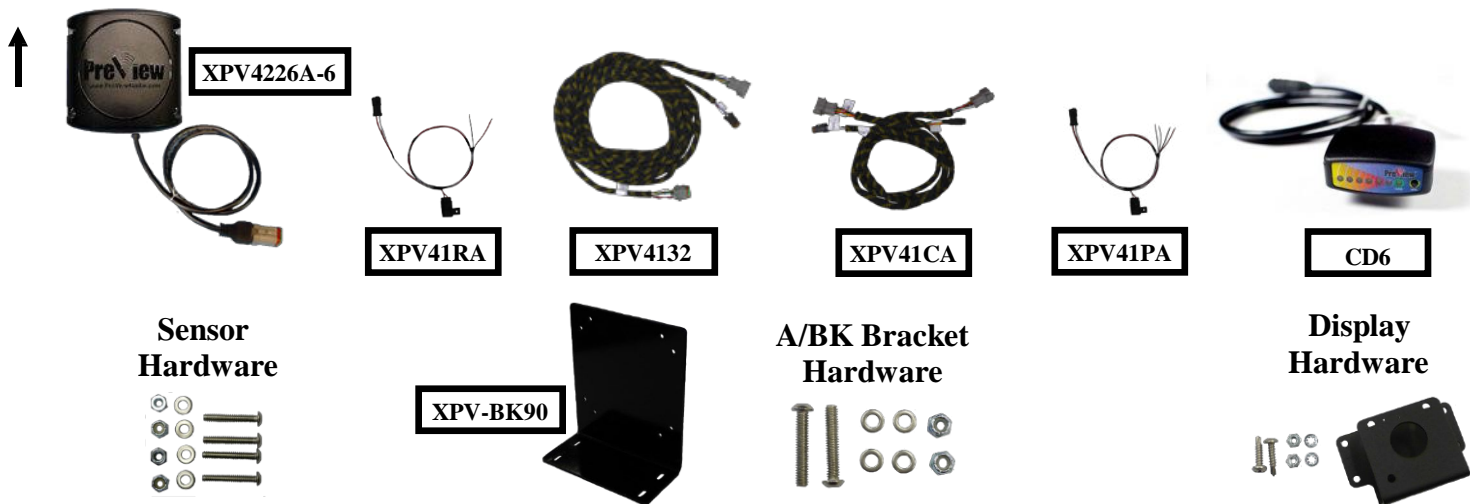

Detailed Wiring Diagram



Back Page

Contact Technical Support with Questions:
 Telephone: +386 3 4900 800
 Email: info@radar-electronic.com
 http://radar-electronics.com

The quick install guide is only a supplement to the product manuals. Please read all of the manuals for complete information and instructions before installing the product.



X26-6-CB PreView[®] System

QUICK INSTALLATION GUIDE

info@radar-electronics.com
 http://radar-electronics.com
 Phone: +38634900800




Initial System Power Up and Test

Once the sensor and display are installed, wired, and connected, power should be applied to test system operation. The vehicle must be placed in reverse to power up the system, the green LED will be the only light illuminated (the 3rd yellow LED may flash once). If any of the detection (yellow) LED's are lit and there is no object in the machine's vicinity, check for any objects on the machine which may be detected by the sensor. If possible, move the sensor so it does not detect the object(s). If it is not possible to relocate the sensor contact PRECO Electronics[®].

If for some reason the system is malfunctioning, the status LED will turn from green to red, one of the yellow LEDs will be illuminated, and the buzzer will emit a short stutter sound. Refer to the Troubleshooting section in the display manual to determine the error and potential causes.

Once the system has been installed, the detection zone should be tested. The test should be performed with two people, one who remains in the cab (the operator), and one who walks through the sensor field to the rear of the vehicle (the assistant). The operator engages the parking brake, presses the vehicle brake, and places the vehicle in reverse. The assistant then walks through the detection zone while the operator notes where the display buzzer activates. An accurate when the display buzzer activates.

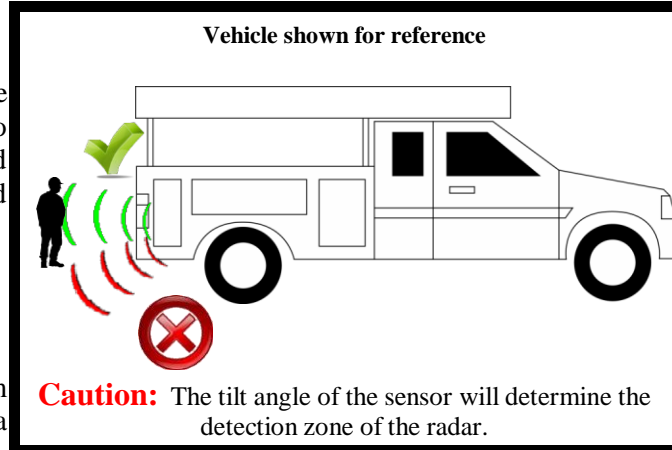

The PreView[®] system is a blind spot collision warning system designed to supplement other safety practices and/or devices. The machine operator is always the first line of defense when safely operating a vehicle.

TESTING / MAINTENANCE

Test the PreView[®] Radar System every day for functionality and performance prior to vehicle operation, refer to the sensor manual.

